



• HIGH QUALITY • LOW ODOR • ENVIRONMENTALLY SAFE

Sustainable and environmentally responsible building practices are rapidly becoming an industry standard. Architects, builders, and painters are looking for products that meet rigorous environmental standards while giving exceptional performance.

Timber Pro's **Crystal Urethane** bridges the performance-gap between high-VOC solvent-borne oil urethanes and water-based acrylic coatings. It brings the beauty and durability of higher VOC products, without the fumes and flammability.

Durable, nonflammable finish for interior doors, windows, trim, beams, wood paneling, and log surfaces.

Performs better than solvent-borne urethanes while being green and sustainable.

Low odor means no need to vacate indoor spaces for extended periods of time while drying.

☎ 503.232.1705/888.888.6095 ✉ usainfo@timberprocoatingsusa.com

www.timberprocoatingsusa.com

Timber Pro Coatings

2232 E. Burnside St. Portland OR 97214





VOCs, flammability, and dry time

Crystal Urethane is nonflammable and has only 74 VOC grams/liter. It is low-odor when wet and odor-free once dry. Coats dry within an hour, compared to the 12-24 hours of a solvent-borne oil urethane.

Flexibility

More flexible than an acrylic urethane to better withstand natural expansion and contraction of wood.

Color

The acrylic component of our hybrid blend results in less yellowing of wood when compared to solvent-borne oil urethane.

Heat resistance

The oil/acrylic blend in Crystal Urethane protects wood from heat better than acrylics.

Coats

Higher in solids, resulting in fewer coats needed than an acrylic urethane.

Sanding

Needs less sanding between coats than a solvent-borne oil urethane.

Flow

Flows and self-levels as well as a solvent-borne oil urethane, requiring less expertise to apply.

Sprayable


Can be lightly misted with an airless sprayer and dries so quickly that continuous misting can build a film in a short amount of time.

Scratch and mar resistance

More durable and resistant than acrylic urethane.

Chemicals and spills

More resistant to solvents and liquid spills than acrylic urethanes with no water marks if liquid is left to sit.

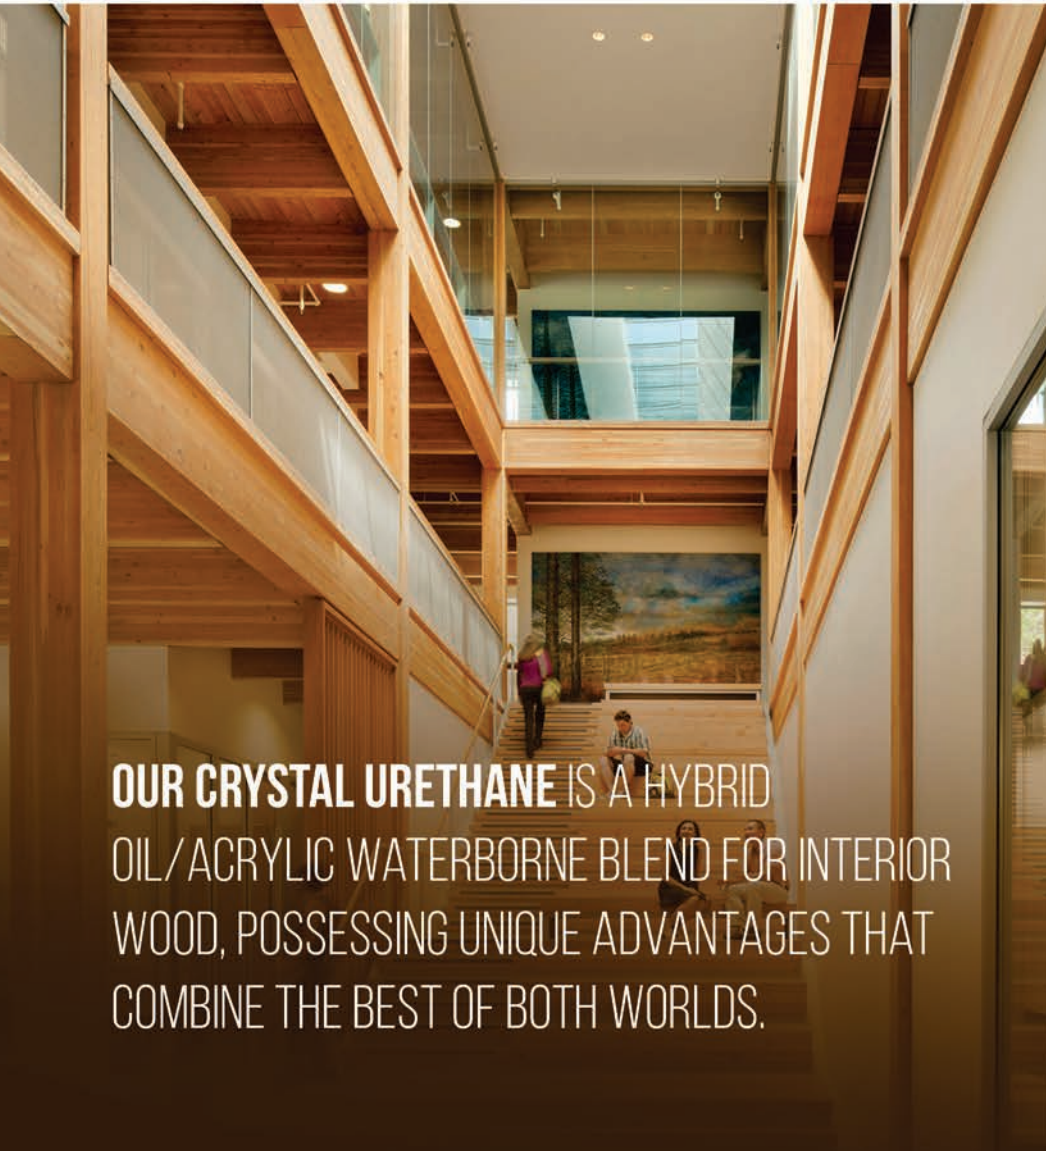

OUR CRYSTAL URETHANE IS A HYBRID OIL/ACRYLIC WATERBORNE BLEND FOR INTERIOR WOOD, POSSESSING UNIQUE ADVANTAGES THAT COMBINE THE BEST OF BOTH WORLDS.

☎ 503.232.1705/888.888.6095 ✉ usainfo@timberprocoatingsusa.com

www.timberprocoatingsusa.com

Timber Pro Coatings

2232 E. Burnside St. Portland OR 97214

